

Self Assembly Instructions

Leg Assembly Instructions - Uniqa

Please read these instructions carefully before fitting the legs to your furniture. It is critical that the legs are correctly fitted otherwise serious damage could occur and frame warranties may be invalid. Two people are required, cross head screwdriver and a spanner suitable for an M8 bolt will be needed. The sofa is heavy so should be assembled near as possible to point of use. Take care when lifting to avoid personal injury (or) damage to the furniture.

No liability will be accepted for damage or injury caused by incorrectly installed furniture.

Bag contents - 3 & 2 Seater, Chair and Cuddler Static



x4 Wood or Metal Feet



x1 Central Support Foot

Bag contents - 3 & 2 Seater Motion Lounger



x2 Central Support Foot



x6 Wood or Metal Feet



x1 Centre foot and Bracket (with bolt)

Steps 1 - 5 apply to all Uniqa Models

Step 1

Remove bag by cutting ties and push remainder of the ties down the back of the seat (see Fig 1)



Fig 1. Bag Containing Feet on seat cushions

Step 2

Remove all seat and back cushions, and put to one side. Carefully lie the unit onto its back on a clean surface, this is a two person operation



Fig 2. Underside of sofa exposing all four temporary feet




Fig 3. Temporary foot and locations of M8 Bolts



Fig 4. Sofa on back exposing all four temporary feet

Step 3

Unscrew the temporary feet and M8 bolts using a cross head screwdriver

Step 4

Correctly place the foot above the two bolt holes (see fig 5).

Step 5

Securely fasten the two M8 bolts using a cross head screwdriver.

Repeat **Steps 4 and 5**

Five more times for the Split Motion Lounger totalling three feet on each unit (see Fig 6).

Three more times for a Static model (see Fig 7)



Fig 5. Wood foot (left) metal foot (right) with bolts shown in position

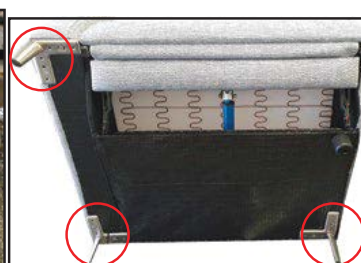


Fig 6. Shows locations of all three feet.



Fig 7. Shows locations of all four feet.

Step 6 - 3 SEATER STATIC MODEL ONLY

In the centre of the base is a bolt hole.

This has four staples around the outside to help locate.

Attach the central plastic support leg as illustrated.

FAILURE TO COMPLETE THIS STEP WILL RENDER THE FRAME GUARANTEE INVALID



Fig 8. location for central support foot

Steps 7 - 11 apply to all Uniqa Models

Step 7

The 3 and 2 seater Split Motion Loungers will arrive as two separate units, both with temporary plastic feet used to transport the furniture (Fig 9. Circled in red) in the centre. These feet need to be replaced with the larger central support feet provided within the bag (see step 1)

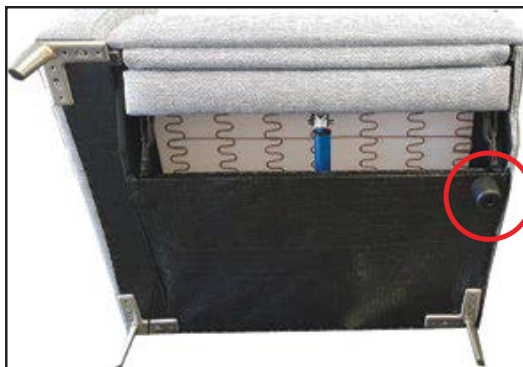


Fig 9. Left hand 3Str Split Motion Lounger unit

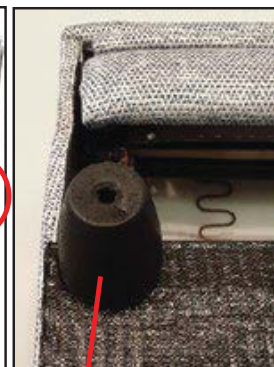


Fig 10. Plastic central foot replaces temporary foot

Step 8

The two separate units will have to be attached via the brackets located on the armless sides (see Fig 11). There will be two on each side, one at the front and one towards the back. The right hand unit will need to be pushed into the left hand unit to slide the brackets together. Ensure both brackets are secured before proceeding

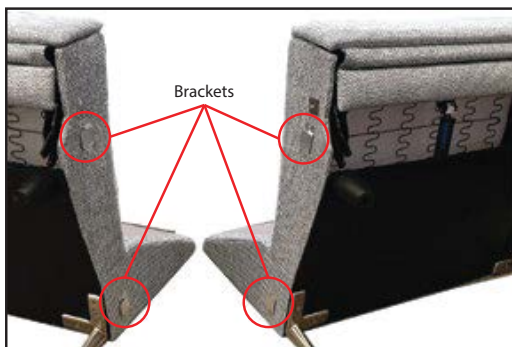


Fig 11. Shows locations of brackets

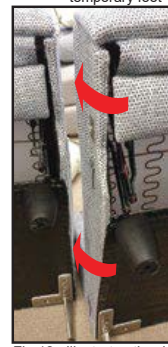


Fig 12. Illustrates the right hand unit being pushed into the left hand unit

Step 9

Connect the cables leading off into the transformer and plug into power supply, then fully extend the motions using the controls located on the outside of both the arms.



Fig 13. Cables fitting into transformer



Fig 14. Shows the motions fully extended

Step 10

To attach the centre foot, first locate the bolt hole, situated approximately 13cm away from the front of the sofa (Fig 15). Once located remove the bolt from the metal bracket of the centre foot and align the hole to the sofa. Feed the bolt through one side through the units and into the opposite side of the bracket (Fig 16). Tightly fasten the nut with a spanner to secure the foot into place (Fig 17).

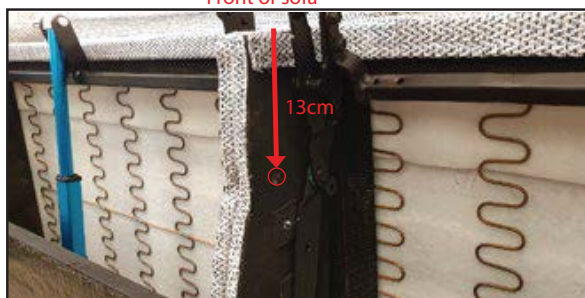


Fig 15. Location of the bolt hole, approx 13cm from front of sofa

Step 11

Once all feet have been attached the sofa will now be ready to turn onto its feet DO NOT PIVOT SOFA ON BACK FEET instead lift weight of sofa off the floor and turn onto its feet. Once the sofa is upright and in the desired position replace all seat and back cushions.

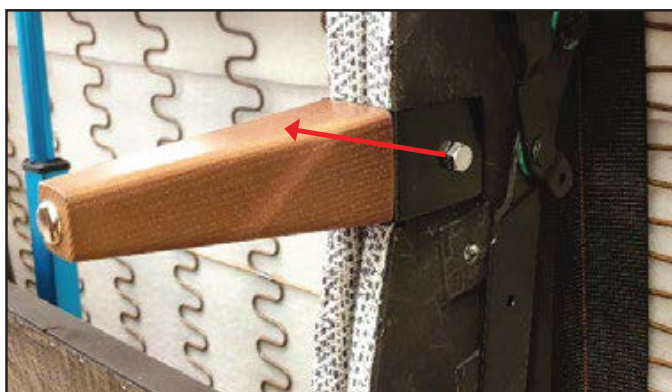


Fig 16. Location of the bolt hole, approx 13cm from front of sofa



Fig 17. Shows bolt securely fed through, connecting both units.